

24-Port Gigabit + 4-Port 10 Gigabit SFP+ L2+ Managed Ethernet Switch

FR-S3028TF-D


Characteristics

- The L2+ managed 10G switch
- Four 10 gigabit fiber port
- Fully integrated 1.5MB packet buffer
- Integrated High-Performance Cortex-A9 processor
- Internal power supply, high performance, durable stability
- Switching Capacity 128Gbps

Description

FR-S3028TF-D is a high performance L2+ managed switch. Provides twenty-four 10/100/1000Mbps self-adaptation RJ45 port, plus four 10 gigabit –1000/10000Mbps SFP+ optical port, it can be used to link bandwidth higher upstream equipment. Using store-and-forward technology, combined with dynamic memory allocation, ensure the bandwidth effective allocation to each port. Support VLAN ACL based on port, easily implement network monitoring, traffic regulation, priority tag and traffic control. Support traditional STP/RSTP/MSTP 2 link protection technology; greatly improve the ability of fault tolerance, redundancy backup to ensure the stable operation of the network. Support ACL control based on the time, easy control the access time accurately. Support 802.1x authentication based on the port and MAC, easily set user access. Perfect QOS strategy and plenty of VLAN function, easy to maintenance and management, meet the networking and access requirements of enterprises, intelligent village, hotel, office network and campus network. Built-in high reliability, design for wide voltage input application power supply, even if the voltage is not stable of power grid, also can guarantee the equipment can work normally.

The application of topology

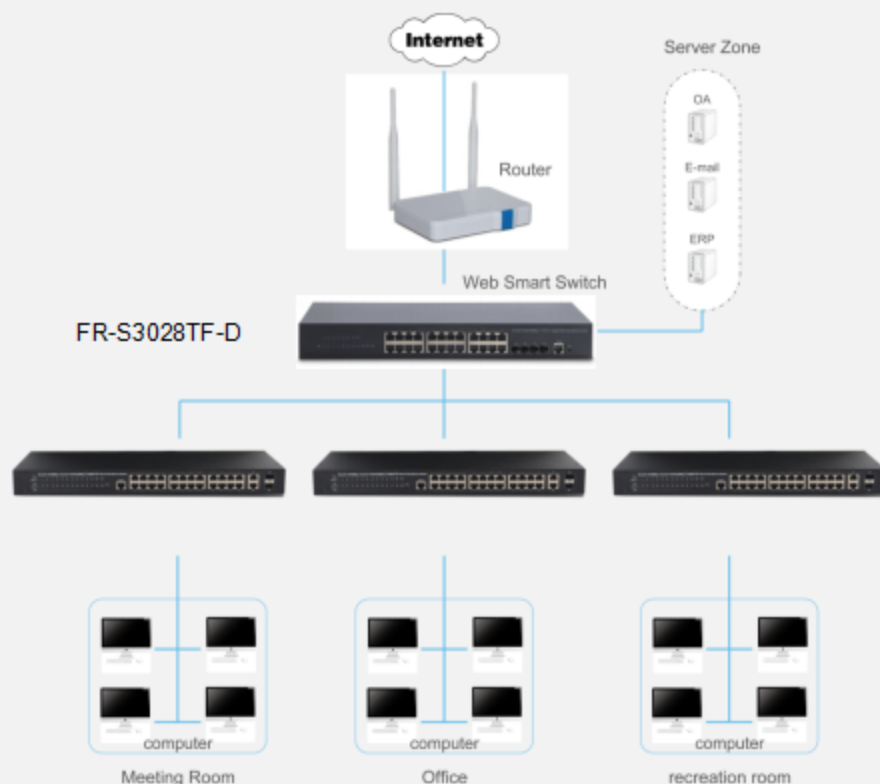

Smart
LINK



● 24-Port Gigabit + 4-Port 10 Gigabit SFP+ L2+ Managed Ethernet Switch FR-S3028TF-D

Features

- Comply with IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3ae, IEEE802.3x, IEEE802.3z, IEEE802.3ad standards
- Supports IEEE802.3x flow control for Full-duplex Mode and backpressure for Half-duplex Mode
- Supports MAC address auto-learning and auto-aging
- Store and forward mode operates
- Support SNMP/RMON/TELENT
- Integrated High-Performance Cortex-A9 processor.
- Support IEEE802.1p Priority Queues
- Support low power consumption and energy saving (EEE), control the broadcast storm.
- Support Storm Control
- Support QoS、Port Mirroring、Link Aggregation Protocol
- Support manual reset function
- LED indicators for monitoring power, link/activity
- Web-based Management Support
- Twenty-four 10/100/1000Mbps self-adaption RJ45 port, plus four 1000/10000Mbps SFP+ port, it can be used to link bandwidth higher upstream equipment.
- Internal power adapter supply

Hardware Specification

Model	FR-S3028TF-D
Chipset	BCM53346+B50282
Standards	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3ae, IEEE802.3x, IEEE802.3z, IEEE802.3ad, IEEE802.1P, IEEE802.1Q
Network Media (Cable)	10BASE-T: UTP category 3,4,5 cable (maximum 100m) 100BASE-Tx: UTP category 5,5e cable (maximum 100m) 1000BASE-T:UTP category 5e,6 cable (maximum 100m) 1000Base-X:MMF,SMF 10GBase-X:MMF,SMF
Interface	24 x 10/100/1000Mbps Auto-Negotiation ports four 1000/10000Mbps SFP+ port 1 x RJ45 Console Port
Transfer Method	Store-and-Forward
Switching Capacity	128G
MAC Address Learning	16K
Packet Forwarding Rate	95.24Mpps
Packet Buffer	1.5MBytes
Jumbo Frame	12KBytes

● 24-Port Gigabit + 4-Port 10 Gigabit SFP+ L2+ Managed Ethernet Switch FR-S3028TF-D

Indicators	Per Device	Power: Green
	Per Port	Link/Activity: Green
Power Supply	100~240VAC,50/60HZ,36W, internal power	
Power Consumption	Maximum: 18.5W (220V/50Hz)	
Dimensions (W×D×H)	440x330x44.5mm (19" metal case)	
Environment	Operating Temperature: 0°C~45°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage humidity: 5%~90% non-condensing	

FULLRIVER
Link our dreams

● 24-Port Gigabit + 4-Port 10 Gigabit SFP+ L2+ Managed Ethernet Switch FR-S3028TF-D

Software Specification

management	<ul style="list-style-type: none"> ● Support Telnet, SSH remote management ● Support the SNMP ● Support cluster with cluster network management
Port features	<ul style="list-style-type: none"> ● Support port isolation ● Support port loop detection ● Support the ULDP ● Support LLDP ● Support the Port Channel configuration ● Support LED shut - off ● Support Jumbo packet
VLAN&MAC Address	<ul style="list-style-type: none"> ● Support for MAC/strategy/port/protocol/IP subnet VLAN ● Support Dot1q tunnel ● Support GVRP ● VLAN - translation ● Support support MAC address automatic learning and aging ● Support the source MAC address filtering
STP	<ul style="list-style-type: none"> ● Support STP
QoS	<ul style="list-style-type: none"> ● Support WRR, WDRR queue scheduling algorithm ● Support flexible QinQ operation
Three layer forward and routing protocols	<ul style="list-style-type: none"> ● Support three layer forward ● Support the ARP configuration ● Support the static routing, OSPF, RIP configuration ● Support IPv4 and IPv6 routing
DHCP	<ul style="list-style-type: none"> ● Support the DHCP relay ● Support the DHCP Server ● Support DHCP Snooping
Multicast protocol	<ul style="list-style-type: none"> ● Support DCSCM configuration ● Support IGMP Snooping ● Support IPv6 multicast, MLD configuration
Safety features	<ul style="list-style-type: none"> ● Support 802.1x, the Radius authentication ● Support for AM ● Supports IPv6 security RA configuration ● Support the MAB configuration ● Support SSL ● Support for protection against Dos attacks ● Support ACL
reliability	<ul style="list-style-type: none"> ● Support MRRP ● Support ULPP
The network time	<ul style="list-style-type: none"> ● Support SNTP ● Support the NTP
Traffic monitoring	<ul style="list-style-type: none"> ● Support port mirror ● Support the flow

